

LED Multi-media player

User Manual



Before you use the LED controller, please
read this file first and save it for future

We will struggle and serve for the booming development of LED industry!

BX-YQ3AE

Statement

Any companies or privates cannot copy, transcribe or translate part or whole content of this file without our written permission. And cannot use it on any business or benefit filed with any forms.

The specifications and information which are mentioned on the file is for reference only, if there' s update, we will not inform you. This file is only for guidance, and all information will not be for any promises.

CATALOG

| | |
|--|----|
| Brief Introduction..... | 1 |
| About Software..... | 1 |
| Characteristics..... | 1 |
| Guiding..... | 2 |
| Safety Notes..... | 3 |
| Function instruction..... | 4 |
| Technical specifications..... | 8 |
| Shape and parameter specification..... | 9 |
| Physial dimension..... | 9 |
| Back panel diagram..... | 9 |
| Front panel diagram..... | 10 |

Brief Introduction

Thanks for ordering LED control card. The design of the control card is according to the international and industrial standard, but if the operations are incorrect, it will probably bring you personal injury and financial harm. As to avoid these and win more from your equipment, please obey the specifications of this file.

About Software

Cannot do any modification, decompilation, disassembling, decoding or reverse engineering on our software, it's illegal.

Characteristics

- ◆ Big loading area, 4 Gigabit Ethernet port output, 1080p@60 frame, 2*1080p@30 frame .
- ◆ Support high refresh, excellent photograph effect while using mobile phone, camera .
- ◆ The output gray level is from 0-65536.
- ◆ High performance CPU, hardware decoding, HD video smooth playback .
- ◆ On board 100M Ethernet port, integrated 4G wireless module, WIFI module, also supports external USB WIFI module interface. Built in WIFI can be used either as a hot spot (AP) or as a terminal. Support for external 4G routers.
- ◆ Onboard EMMC large capacity (4G) flash memory, can store 8 hours of high-definition video, ultra high-definition video 4 hours.
- ◆ Indefinite expanding memory.on-board SD card and dual USB interface, USB interface supports large capacity mobile hard disk (1000G).
- ◆ Audio input interface: 1 way DVI input, 1 way CVBS input, 1 way AUDIO input
- ◆ Audio &video output interface: 1 DVI output, 1 AUDIO output, can connect the LCD screen, advertising machine as the train station, bus stations, hospitals and other crowded places.
- ◆ Support USB disk plug and play, and also upload into the memory to play, very suitable for networking inconvenience place program released.
- ◆ Support cluster control, especially suitable for large-scale urban outdoor advertising screen large-scale deployment, management

- ◆ Easy to upgrade the software , you can use pc software or cloud platform to remote upgrade it , no need to the pot.
- ◆ Support temprature, humity, brightness sensor
- ◆ Support remote controller, can use the remote to request program and adjust the brightness, volume, screen test etc..
- ◆ Can manually adjust the brightness, automatic brightness adjustment, 256.
- ◆ Support 512 programs, each program support in 8 areas, can edit a very beautiful display effect.
- ◆ Support Image/text/subtitle/video/lunar/time/dial/timer/temperature/temperature & humidity/noise/weather forecast area
- ◆ Support database,Very suitable for high-speed rail, hospitals, banks and other occasions of information release.
- ◆ Working temperature -40°C~80°C
- ◆ Support the DLL, or the protocol
- ◆ Flexible control method, single user can choice our PC software or iLedcloud platform to edit and release the software, large group of users can use iLedsys to set up there own server ,set up VPDN to edit and release the programs.

Guiding

Accessory



Safety Notes

- ◆ Input voltage is 5V, voltage range is from 4.75V-5.25V, please make sure the quality of the power supply of YQ series.
- ◆ Please make sure that all the power supply cables are plugged off when you want to connect or plug off any signal or controlling cables.
- ◆ Please make sure that all the power supply cables and signal cables are plugged off when you need to put in or take off the hardware equipment.
- ◆ Please make sure the environment is clean, dry and ventilated when you use this product, also, do not put this product to a high temperature and wet environment.
- ◆ This product is electronic products, please keep away from fire, water source and flammable&combustible products.
- ◆ There's high pressure components in this products, please do not open the box and repair it by yourself.
- ◆ Turn off the power supply immediately when you find smoking, peculiar smell or something unusual. And contact with us soon.

Function instruction

Control area

There are two gigabit output ports, in YQ2A, Each gigabit port can support 1280× 1024 pixels, the maximum width ≤1920, the maximum height ≤1024. When the user screen parameter is ≤ 1280* 1024, refresh rate =60, video, stunt picture will be very smooth.

Two gigabit output is consistent, you can connect dual-screen, synchronization display the same contents. When the refresh rate (equivalent to playing video frame rate) is 60 frames, the display effects is smoothly.

Support high refresh /Perfect photograph effect

YQ series of controller support high refresh (here refers to the receiving card for LED screen refresh, users scan) or mobile phone camera shooting LED large screen picture from time to time, no distortion, no scanning line, the true nature and excellent results.

In the ordinary low refresh display screen, camera, you can see the stripes, stripes is actually a scan line, generally horizontal black stripes line, it is caused by the screen refresh rate is low, is the camera to capture the present.

Synchronous&asynchronous integration

The controller provides two modes of operation: synchronous mode and asynchronous mode. In asynchronous mode, users can edit and release programs by themselves. In synchronous mode, the controller can receive external input video source equipment, and synchronize the output and sound of the equipment such as TV set, set-top box, DVD and so on.

Mode switching can be done by the mode button on the front panel of the controller. When the button is pressed, the controller sequentially enters the synchronous DVI mode, synchronous CVBS mode, asynchronous mode.

Multiple communication mode / support network topology

Multiple communication mode / support network topology

The controller is equipped with a 100M network interface, internal integrated 4G wireless module, WIFI

module, also supports USB interface, external WIFI module. Built-in WIFI both as a hot spot (AP), but also as a terminal. Supports external 4G routers.

For the general network topology, users can use the network cable directly access the router or switch, and management PC communication.

For short-range wireless applications, the user can open the controller built-in WIFI, access to their own routers, to achieve online control management. Users can also open the controller's WIFI hotspots, access to their own PC controller, to achieve management control. For the controller hot spots, the user can set the password, the rights management.

For outdoor remote screen, because the wiring is inconvenient, you can choose the way of remote wireless, the user uses the onboard integrated 4G module, insert the phone card, set the server mode or web mode, the controller can automatically log management platform. Users can also choose to use the USB interface of the external 4G router.

For large users, the controller supports VPDN (virtual private dial-up network), the screen can cross the public network, distributed in the city's traffic arteries, or between the city, constitute a virtual private network, remote groups, security management

Support iLEDCloud platform

We provide different type of control platform, including PC software LedshowYQ, iLEDCloud platform , iLEDsys system. LedshowYQ is used on PC , it can support windows XP, win7, win10 and other mainstream operating system. The software provides a comprehensive, rich controller configuration, programming, program release function.

iLEDCloud platform , is a online multimedia information publishing platform, its core server pinned on the Alibaba cloud, providing excellent reliability and stability. Users only need the browser to use the platform, you can remotely edit program, preview the program, scheduled fixed-point playback. Users can log in via phone, pad and pc.

iLEDsys system is a high-end customers from the deployment of cloud platform, the platform will run on the user's own computer above, to achieve a more secure, stable and efficient management.

Small users, if it is LAN application environment, you can choose to provide our PC software LedshowYQ for control management.

If the use of small users need to cross the public network, you can access iLEDCloud cloud platform, through the web browser to manage.

Large group users can be managed from the deployment cloud platform iLEDsys system. If you need to cross the public network, you can create VPDN, to achieve across the public network of virtual intranet, to manage.

Large storage capacity / capacity can be expanded

The controller provides high-capacity built-in flash memory, also supports external capacity expansion. Controller built-in 4G flash memory, you can store 8 hours of high-definition video.it provide SD card slot, allowing users to insert large capacity SD card, to expand capacity . When users use large capacity SD card expansion capacity, please switch the working medium to the SD card. The controller also supports high-capacity mobile hard drives on the USB interface, which can support up to 1T (1000G) of removable hard disk when the mobile hard drive is powered by a separate adapter. When users use large-capacity mobile hard disk expansion capacity, the need to switch the working medium to USB mode.

Hard decoding / audio & video input / output / double video areas/ zoom / ad machine

The controller uses high-performance CPU, hardware decoding, high-definition video playback smooth. The controller provides 1 DVI input interface, 1 CVBS input interface, 1 AUDIO input, user-friendly access to a variety of external video source equipment. The external video can be played as a video area (with zoom) to achieve dual video effects.

External video source can also be full-screen playback, to achieve synchronization effect.

The controller provides 1 channel DVI output, 1 AUDIO output, the user can connect LCD LCD screen or TV and other equipment, as indoor crowded places advertising machine operation, such as bus stations, railway stations, high-speed rail stations, banks, hospitals Public places.

Program area/variety

Supported area types are rich in graphic text, subtitles, video, lunar calendar, dial, timing, temperature, humidity, announcements, weather forecasts.

Text areas can be pictures or text, supporting a wealth of special effects, including curtain, pan, laser, mosaic, shutter and other common effects.

Controller processor built-in GPU (graphics processing unit), you can achieve brilliant 3D effects.

The controller supports a variety of time zones, you can set the font of analog dial, dial point, select the style, the color set. Also can achieve a text type time display, including the date, hour, and week, can set the single or multi line display. The support area, including the day, solar term. Support time zones, such as "distance from national day, 18 days, 18 hours, 18 minutes, 18 seconds" and the like.

Support remote update/daily record

Controller support remote upgrade, users can use PC software LedshowYQ, cloud platform iLEDCloud, deployment of cloud platform iLEDsys system for remote upgrade, enhance controller functionality, performance, solve bug.

The controller has built-in logging function, it can record various important events, and can remotely consult, analyze and solve the fault.

Support remote controller

The controller supports infrared remote control, can change programme on request , lock program. You can easily adjust the screen brightness, volume, screen switch machine, test, experience comparable to the TV remote control, especially for the convenience of indoor display management.

Time /remote switch controller

Match with VMF multi-function card,the controller supports remote start, shutdown control , effectively reduce the screen power consumption, saving energy.

Support mutli-type of sensor

Match with VMF multi-function card.it collect temperature, humidity, brightness, noise and other common sensor data.

Suppport secondary development

Provides C # / C + + dynamic library, can support edit , release, remote control programs .

Provides JAVA dynamic library, support dynamic zone, synchronization area.

Support database

The controller supports the database area, supports multi-page display, supports mySQL, sqlserver and other format database.

Support Android App,easy operator

It can be controlled with Android APP ledshow , managed easily.

APP support search screen, support multi-language, support dynamic preview, video transcoding function.

Support gesture zoom in and out of partition function.

Technical specifications

| Screen parameter | |
|----------------------|-----------------------|
| Parameter | Specifications |
| Min Pixels | 128 x 64 |
| Max Pixels | 1280×1024 |
| Total Pixels | 1280K Pixels |
| Max pixels in width | 1920 |
| Max pixels in height | 1024 |
| Receiving card | BX-V75 receiving card |

| Specifiction | |
|---------------------|---|
| Working voltage | 4.5V~6.5V; Please be sure the good quality of power |
| Maximum power | ≤10W |
| Working temperature | -40℃~80℃ |


Shape and parameter specification


Physial dimension

| |
|------------------------------------|
| Physical dimension |
| 194mm \times 118mm \times 46mm |



B

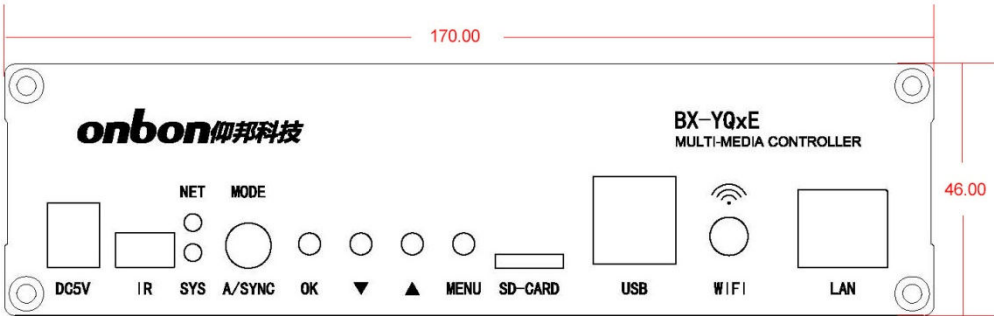

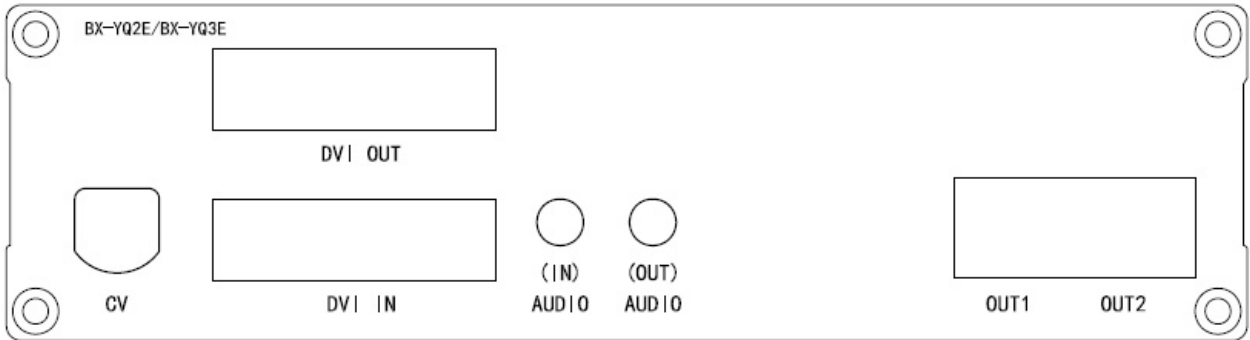

| Video input / output port | |
|---------------------------|--------------------|
| DVI-IN | 1080P@30HZ, 1 HDMI |
| CV | CVBS, PAL/NTSC |
| DVI -OUT | 1 HDMI |

| Audio input / output port | |
|---------------------------|-----------------|
| AUDIO-IN | 1 3.5 mm stereo |
| AUDIO -OUT | 1 3.5 mm stereo |

| Gigabit Ethernet interface | |
|----------------------------|--|
| OUT1 | Scan data output port , connect with full color receiving card |
| OUT2 | |

Front panel diagram



| Button description | |
|---------------------------|--|
| DC5V | 5V Power interface, DC voltage input, rated voltage 5V, support 4.5V ~ 6.5V |
| IR | XH254-3P Infrared receiver interface |
| SYS | Indicator light , it will blink twice per minute when controller works good , |
| NET | Net work and fault indicating lamp |
| MODE A/SYNC | Video input mode switch button, Used to switch asynchronous programs quickly, CVBS input, and HDMI input |
| OK | OK button, confirmation button for the interactive menu; a shortcut key for displaying the information on the display when the menu is not switched; |
| θ | Down key, interactive menu focus down |
| π | Up key, interactive menu focus Up |
| MENU | MENU button, Interactive menu open / close key |
| SD-CARD | SD slot, Storage expansion slot |
| USB | USB interface, can be connected U disk, external WIFI module, 4G router, mobile hard disk and so on |
| WIFI | Connect 2.4GHz WIFI antenna, 3 / 4G wireless module interface |
| LAN | Ethernet interface, Fast Ethernet, connected to the computer |

Contact Us

Shanghai ONBON Technology Co.,Ltd (Headquarters)

Address: 7 Floor, Tower 88, 1199#, North Qinzhou Road, Xuhui District, Shanghai City, China

Tel Phone: 086-21-64955136

Fax: 086-21-64955136

Website: www.onbonbx.com

ONBON (Jiangsu) Optoelectronic Industrial Co.,LTD

Address: 1299#, Fuchun Jiang Road, Kunshan City, Jiangsu Province, China

Sales Contacts

Tel: 0086-15921814956 0086-15800379719

Email: onbon@onbonbx.com

Second Development

Tel: 0512-66589212

Email: dev@onbonbx.com

iLEDCloud

Website: <http://www.iledcloud.com/>



Public Wechat



ONBON APP